

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number  
**WO 2004/045111 A2**

(51) International Patent Classification<sup>7</sup>: **H04B 10/00**

(21) International Application Number:  
PCT/JP2003/014351

(22) International Filing Date:  
12 November 2003 (12.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002-329448 13 November 2002 (13.11.2002) JP

(71) Applicant (for all designated States except US): MAT-  
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
571-8501 (JP).

Nobuo [JP/JP]; 3-14, Miyukihigashimachi, Neya-  
gawa-shi, Osaka 572-0055 (JP). NISHIHARA, Kazunari  
[JP/JP]; 4-11-8, Uenoshibamukogaoka-cho, Sakai-shi,  
Osaka 593-8303 (JP). TSURUNARI, Tetsuya [JP/JP];  
18-21-301, Yanagida-cho, Kadoma-shi, Osaka 571-0038  
(JP). YUDA, Naoki [JP/JP]; 5-2-507, Kikugaokaminami-  
machi, Hirakata-shi, Osaka 573-0092 (JP).

(74) Agents: IWAHASHI, Fumio et al.; Matsushita Electric  
Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Os-  
aka 571-8501 (JP).

(81) Designated State (national): US.


(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Published:

— without international search report and to be republished  
upon receipt of that report

[Continued on next page]

(54) Title: OPTICAL COMMUNICATIONS MODULE AND SUBSTRATE FOR THE SAME

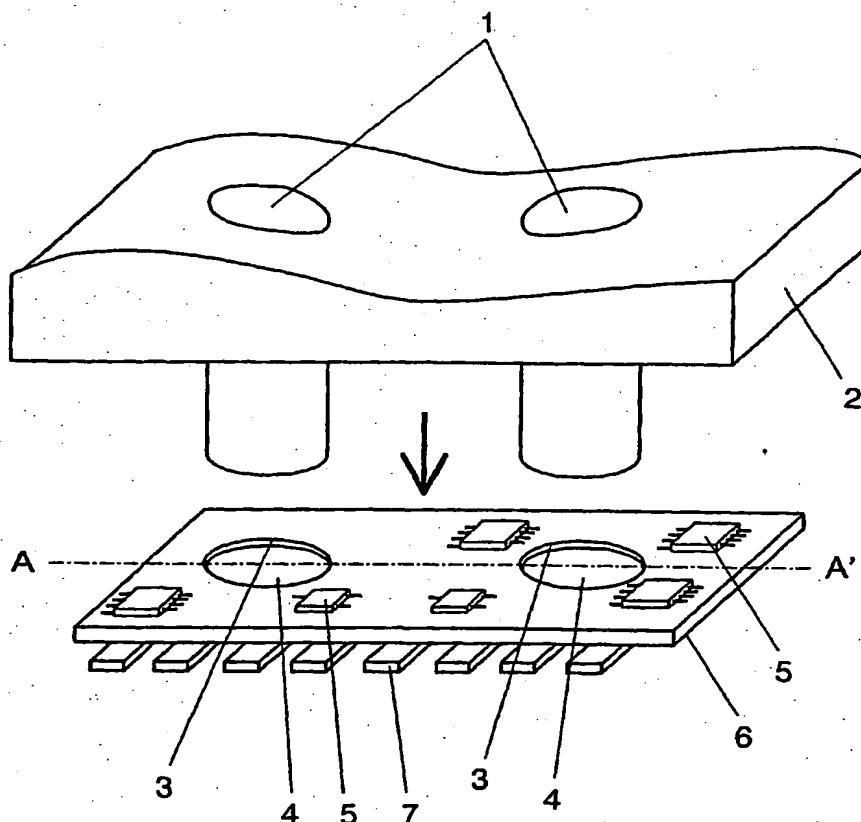

(57) Abstract: A substrate on which cavities having floors and steps is provided. End faces of a light-emitting device, an optical component, and an optical transmission line are abutted on one of the cavity for positioning, and end faces of a light-receiving device, an optical component, and an optical transmission line are also abutted on the other cavity for positioning. Integrated alignment of optical axes facilitates alignment of optical axes, and thus eliminates the need of a CAN package. Accordingly, the size and height of an optical communications module can be reduced.

WO 2004/045111 A2